


RILTO 24V EXTERIOR LED POST SPIKE LIGHT



Cable 100cm

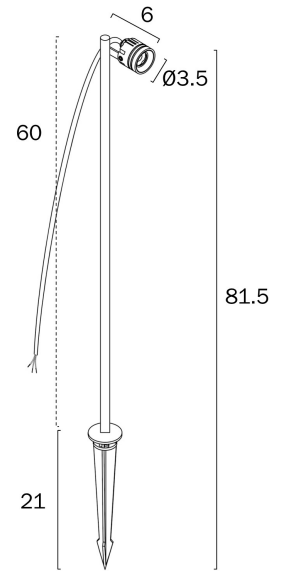

Note: Dimensions are only a guide and may vary due to manufacturing variations.

LIGHT SOURCE

Voltage Input

24V

Total Wattage (max)

3

Globe Type

LED integrated COB

Globe / Light Source qty

1

Globe / Light Source included

Yes

Color Kelvin

3000k

Color Temperature

Warm White

Dimmable

No

Lumens

180

CRI (Color Rendering Index)

>95

SPECIFICATIONS

Lead and Plug

No

IP rating

IP65

Electrical Protection

CLASS III - LOW VOLTAGE, <54v

COLOUR AND MATERIAL

Fixture Finish

Sand

Fixture Material

Aluminium, Polycarbonate

Diffuser Material

Polycarbonate

PRODUCT DIMENSIONS

Fixture Weight (Kg)

0.5

Fixture Height (cm)

60

Telbix.

Fixture Diameter (cm)

3.5

Cable Length (cm)

100

WARRANTY

Replacement Warranty

*3 Years

OTHER

Installation Required

Yes (by Licensed Electrician only)

CARE

Care Instructions

Do not use strong liquid cleaners, Wipe clean with a dry cloth, Aluminium, Brass and Stainless Steel will naturally oxidised and change overtime. Exterior products require regular four (4) monthly cleaning and maintenance to ensure they do not accumulate dirt or other environmental deposits. Wipe the product with a mild detergent and warm water to remove surface deposits. Rinse with fresh water and wipe dry with a soft cloth. An extra temporary protection barrier of water displacement oil can help to maintain the surface, such as WD40, sprayed onto a soft cloth and rubbed onto the surface.

VARIANTS

[RILTO PT3-BK324] RILTO 24V
EXTERIOR LED POST SPIKE
LIGHT (BLACK)



9329501078716

[RILTO PT3-GN324] RILTO 24V
EXTERIOR LED POST SPIKE
LIGHT (GREEN)



9329501078730

[RILTO PT3-RST324] RILTO
24V EXTERIOR LED POST SPIKE
LIGHT (CORTEN)



9329501078723

Find RILTO 24V EXTERIOR LED POST SPIKE LIGHT on
www.telbix.com

