


MANUS 24V MR16 EXTERIOR POST SPIKE LIGHT

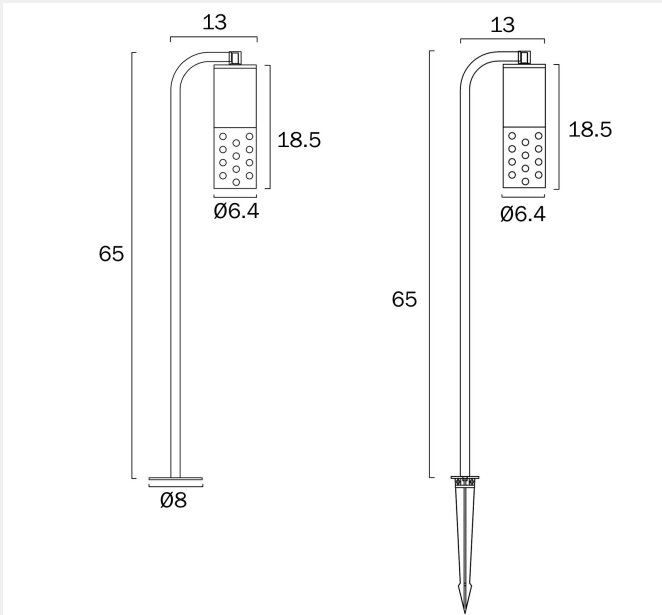

Note: Dimensions are only a guide and may vary due to manufacturing variations.

LIGHT SOURCE

- Voltage Input
24V
- Total Wattage (max)
5
- Globe Type
MR16
- Globe / Light Source qty
1
- Globe / Light Source included
Yes
- Color Kelvin
2700K
- Color Temperature
Warm White
- Dimmable
No
- Lumens
400
- CRI (Color Rendering Index)
>90

SPECIFICATIONS

- Lead and Plug
No
- IP rating
IP65
- Electrical Protection
CLASS III - LOW VOLTAGE, <54v
- Mounting
Surface
- Height Adjustable?
No
- Switch
No

COLOUR AND MATERIAL

- Fixture Finish
Sand
- Fixture Material
Aluminium
- Diffuser Material
Polycarbonate

PRODUCT DIMENSIONS

Fixture Weight (Kg)
0.63

Fixture Height (cm)
65

Cable Length (cm)
100

WARRANTY

Replacement Warranty
*3 Years

OTHER

Installation Required
Yes (by Licensed Electrician only)

CARE

Care Instructions
Do not use strong liquid cleaners. Wipe clean with a dry cloth. Aluminium, Brass and Stainless Steel will naturally oxidise and change overtime. Exterior products require regular four (4) monthly cleaning and maintenance to ensure they do not accumulate dirt or other environmental deposits. Wipe the product with a mild detergent and warm water to remove surface deposits. Rinse with fresh water and wipe dry with a soft cloth. An extra temporary protection barrier of water displacement oil can help to maintain the surface, such as WD40, sprayed onto a soft cloth and rubbed onto the surface.

VARIANTS

[MANUS PT-BK24] MANUS 24V MR16 EXTERIOR POST SPIKE LIGHT (BLACK)	 9329501084014
[MANUS PT-GN24] MANUS 24V MR16 EXTERIOR POST SPIKE LIGHT (GREEN)	 9329501084038

[MANUS PT-RST24] MANUS 24V MR16 EXTERIOR POST SPIKE LIGHT (CORTEN)


9329501084021

Find MANUS 24V MR16 EXTERIOR POST SPIKE LIGHT on www.telbix.com

