


KATO LED DOWNLIGHT 3CCT DIMMABLE

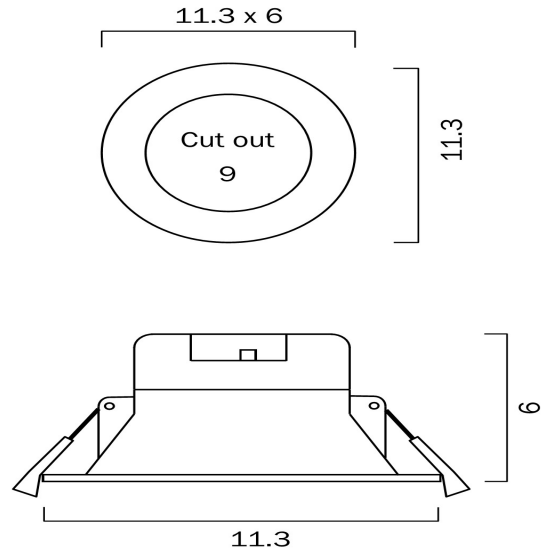

LIGHT SOURCE

Voltage Input

240V

Total Wattage (max)

10

Globe Type

LED integrated SMD

Globe / Light Source qty

1

Globe / Light Source included

Yes

Color Kelvin

3 CCT (3000k - 4000k - 5700k)

Color Temperature

Warm White; Natural White; Cool White

Dimmable

Yes

Lumens

850

CRI (Color Rendering Index)

>84

Surge Protection (Yes/No)

Yes

SPECIFICATIONS

Lead and Plug

Yes

IP rating

IP44

Electrical Protection

CLASS II - DOUBLE INSULATED, EARTH NOT REQUIRED

Insulation class

IC-4

Beam Angle (degree)

120

Control Gear Included

Yes-integrated

Mounting

Recess

COLOUR AND MATERIAL

Fixture Material

Aluminium,Nylon

telbix.

Diffuser Material

Polycarbonate

PRODUCT DIMENSIONS

Fixture Diameter (cm)

11.3

Fixture Height (cm)

6

Cut Out (cm)

9

WARRANTY

Replacement Warranty

*3 Years

OTHER

Installation Required

Yes (by Licensed Electrician only)

CARE

Care Instructions

Do not use strong liquid cleaners,Wipe clean with a dry cloth

VARIANTS

[KATO DL110-WH3C] KATO
LED DOWNLIGHT 3CCT
DIMMABLE (WHITE)



9329501049785

Find KATO LED DOWNLIGHT 3CCT DIMMABLE on
www.telbix.com

