
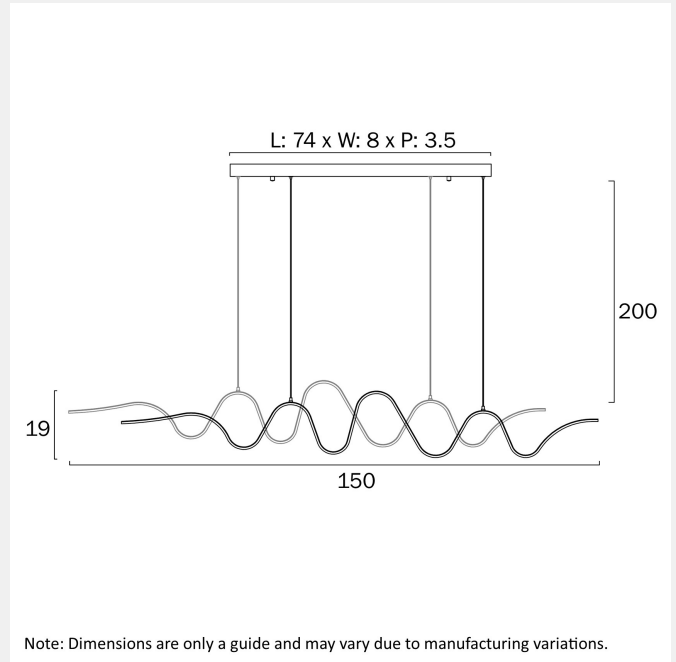


OSELIA LINEAR PENDANT LIGHT

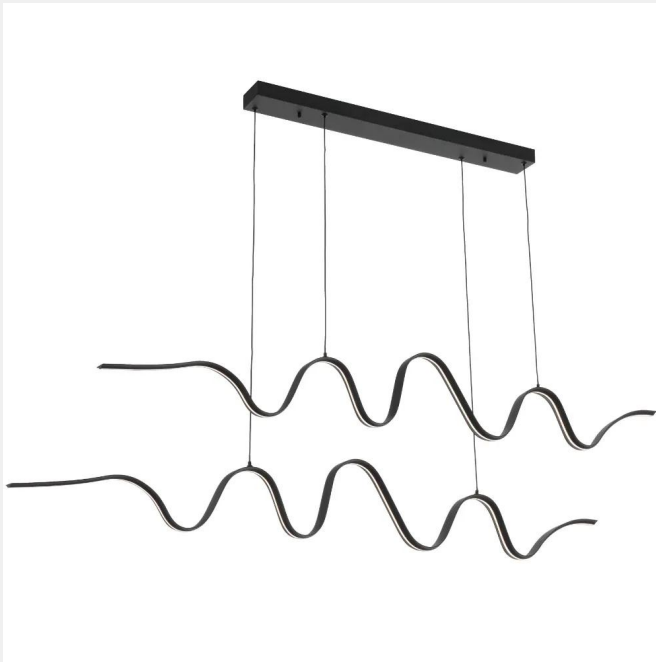

LIGHT SOURCE

Voltage Input

240

Total Wattage (max)

46

Wattage

0

Globe Type

LED integrated SMD

Globe / Light Source qty

0

Globe / Light Source included

Yes

Color Kelvin

3000k

Color Temperature

Warm White

Dimmable

No

Lumens

2560

CRI (Color Rendering Index)

>90

Surge Protection (Yes/No)

0

SPECIFICATIONS

Lead and Plug

No

IP rating

IP20

Suspension Type

Cable

Height Adjustable?

Yes

Raked Ceiling Compatible

0

Mounting

Surface

Electrical Protection

CLASS I - HIGH VOLTAGE, EARTH REQUIRED

Beam Angle (degree)

0

Control Gear Included

COLOUR AND MATERIAL

Fixture Material

Fixture Finish

Sand

Fixture Pantone Color

Glass Color

Diffuser Material

WARRANTY

Replacement Warranty

*3 Years

PRODUCT DIMENSIONS

Fixture Weight (Kg)

Fixture Diameter (cm)

Fixture Height (cm)

19

Fixture Length (cm)

150

Fixture Width (cm)

Suspension Length (cm)

200

OTHER

Installation Required

Yes (by Licensed Electrician only)

Additional Functions

CARE

Care Instructions

Do not use strong liquid cleaners. Wipe clean with a dry cloth. Aluminium, Brass and Stainless Steel will naturally oxidise and change overtime. Exterior products require regular four (4) monthly cleaning and maintenance to ensure they do not accumulate dirt or other environmental deposits. Wipe the product with a mild detergent and warm water to remove surface deposits. Rinse with fresh water and wipe dry with a soft cloth. An extra temporary protection barrier of water displacement oil can help to maintain the surface, such as WD40, sprayed onto a soft cloth and rubbed onto the surface.

VARIANTS

[OSELIA PE-BK] OSELIA
LINEAR PENDANT LIGHT
(BLACK)



9329501084564

[OSELIA PE-WH] OSELIA
LINEAR PENDANT LIGHT
(WHITE)



9329501084571

Find OSELIA LINEAR PENDANT LIGHT on
www.telbix.com

