


PICARD 4 LIGHT CEILING SPOTLIGHT

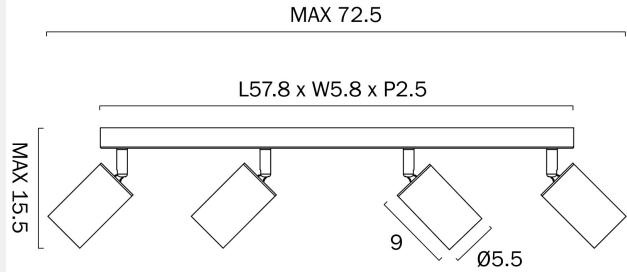

Note: Dimensions are only a guide and may vary due to manufacturing variations.

LIGHT SOURCE

Voltage Input

240V

Total Wattage (max)

28

Wattage

7

Globe Type

GU10

Globe / Light Source qty

4

Globe / Light Source included

Yes

Color Kelvin

3 CCT (3000k - 4000k - 5000k)

Color Temperature

Warm White; Natural White; Cool White

Dimmable

No

CRI (Color Rendering Index)

>90

SPECIFICATIONS

Lead and Plug

No

IP rating

IP20

Electrical Protection

CLASS I - HIGH VOLTAGE, EARTH REQUIRED

Mounting

Surface

COLOUR AND MATERIAL

Fixture Material

Aluminium,Iron

Fixture Finish

Sand

PRODUCT DIMENSIONS

Fixture Weight (Kg)

1.3

Fixture Projection (cm)

15.5

Telbix.

Fixture Length (cm)

72.5

Fixture Width (cm)

5.8

WARRANTY

Replacement Warranty

*3 Years

OTHER

Installation Required

Yes (by Licensed Electrician only)

CARE

Care Instructions

Do not use strong liquid cleaners, Wipe clean with a dry cloth. Aluminium, Brass and Stainless Steel will naturally oxidised and change overtime. Exterior products require regular four (4) monthly cleaning and maintenance to ensure they do not accumulate dirt or other environmental deposits. Wipe the product with a mild detergent and warm water to remove surface deposits. Rinse with fresh water and wipe dry with a soft cloth. An extra temporary protection barrier of water displacement oil can help to maintain the surface, such as WD40, sprayed onto a soft cloth and rubbed onto the surface.,

VARIANTS

[PICARD SP4-BK] PICARD 4
LIGHT CEILING SPOTLIGHT
(BLACK)



9329501075821

[PICARD SP4-WH] PICARD 4
LIGHT CEILING SPOTLIGHT
(WHITE)



9329501075838

Find PICARD 4 LIGHT CEILING SPOTLIGHT on
www.telbix.com

