


TILDA 4 LED DOWNLIGHT

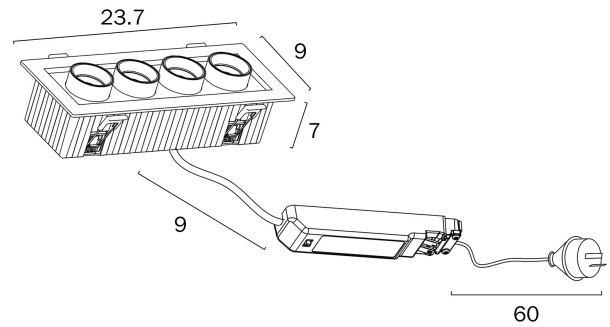

Note: Dimensions are only a guide and may vary due to manufacturing variations.

LIGHT SOURCE

Voltage Input

240V

Total Wattage (max)

20

Globe Type

LED integrated SMD

Globe / Light Source qty

4

Globe / Light Source included

Yes

Color Kelvin

3 CCT (2700k - 3200k - 4000k)

Color Temperature

Warm White; Warm White; Natural White

Dimmable

Yes - TRIAC

Lumens

1500

CRI (Color Rendering Index)

>90

Surge Protection (Yes/No)

Yes

SPECIFICATIONS

Lead and Plug

Yes

IP rating

IP20

Electrical Protection

CLASS II - DOUBLE INSULATED, EARTH NOT REQUIRED

Insulation class

IC-4

Raked Ceiling Compatible

Yes

Mounting

Recess

COLOUR AND MATERIAL

Fixture Material

Polycarbonate

Fixture Finish

Matte

PRODUCT DIMENSIONS

Fixture Weight (Kg)

0.5

Fixture Height (cm)

7

Fixture Length (cm)

23.7

Fixture Width (cm)

9

Cable Length (cm)

69

WARRANTY

Replacement Warranty

*3 Years

OTHER

Installation Required

Yes (by Licensed Electrician only)

CARE

Care Instructions

Do not use strong liquid cleaners,Wipe clean with a dry cloth

VARIANTS

[TILDA DL4-WH] TILDA 4 LED
DOWNLIGHT



9329501073599

Find TILDA 4 LED DOWNLIGHT on
www.telbix.com

